




NOTES:

1. SUBSTRATE:  
N-BK7
2. S2 TO BE PARALLEL TO S1 TO <30 ARCSEC
3. COATING (APPLY ACROSS CLEAR APERTURE)

S1&S2: Ravg ≤0.5% @ 600 - 1050nm

△ FINE GRIND SURFACE

5. ROHS COMPLIANT

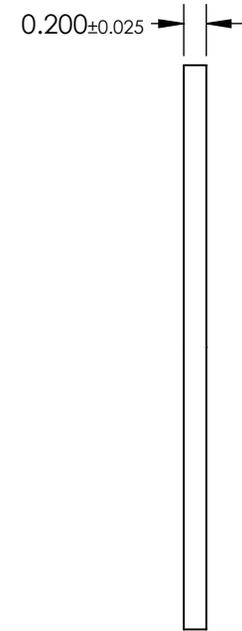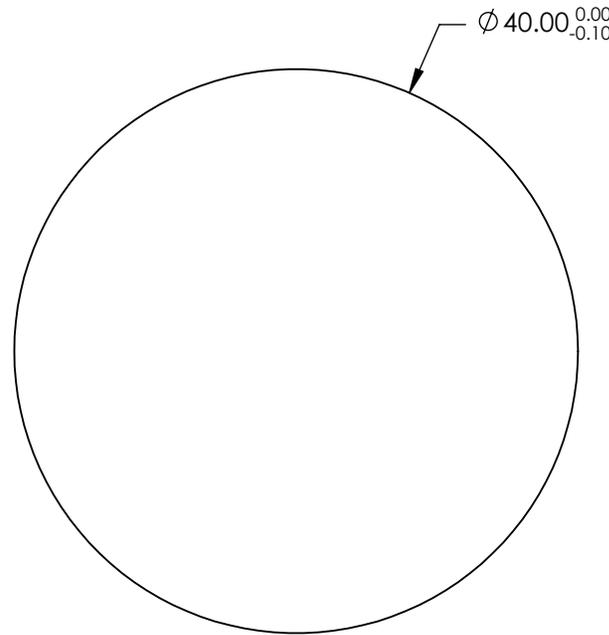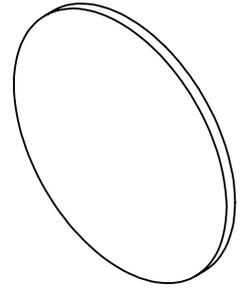

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

|                  | S1                  | S2                  |
|------------------|---------------------|---------------------|
| SHAPE            | PLANO               | PLANO               |
| SURFACE QUALITY  | 40-20               | 40-20               |
| WAVELENGTH RANGE | 600-1050nm          | 600-1050nm          |
| BEVEL            | PROTECTED AS NEEDED | PROTECTED AS NEEDED |

THIRD ANGLE PROJECTION

ALL DIMS IN mm

Edmund Optics®

TITLE

40mm Diameter NIR I Coated, Ultra-Thin  
N-BK7 Window

DWG NO

22050

SHEET  
7 OF 8