


1. SUBSTRATE:  
SUPRASIL® 300

- S1 & S2: NIR II  
 $R(ABS) \leq 1.5\%$  FROM 750-800nm  
 $R(ABS) \leq 1.0\%$  FROM 800-1550nm  
 $R(AVG) \leq 0.7\%$  FROM 750-1550nm



5. FINE GRIND SURFACE

- 

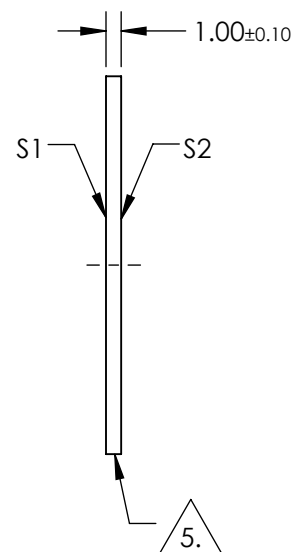

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2			 Edmund Optics®		
SHAPE	PLANO	PLANO	<div>THIRD ANGLE PROJECTION</div> 	TITLE	25mm Dia., 1mm Thick, NIR II Coated Suprasil Window		
SURFACE QUALITY	10-5	10-5					
WAVELENGTH RANGE	750 - 1550nm	750 - 1550nm					
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO	25590	SHEET 1 OF 1

