


NOTES:

- 1. SUBSTRATE : Barium Fluoride (BaF2)
- 2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: Uncoated
 - S2: Uncoated

3. FINE GRIND SURFACE

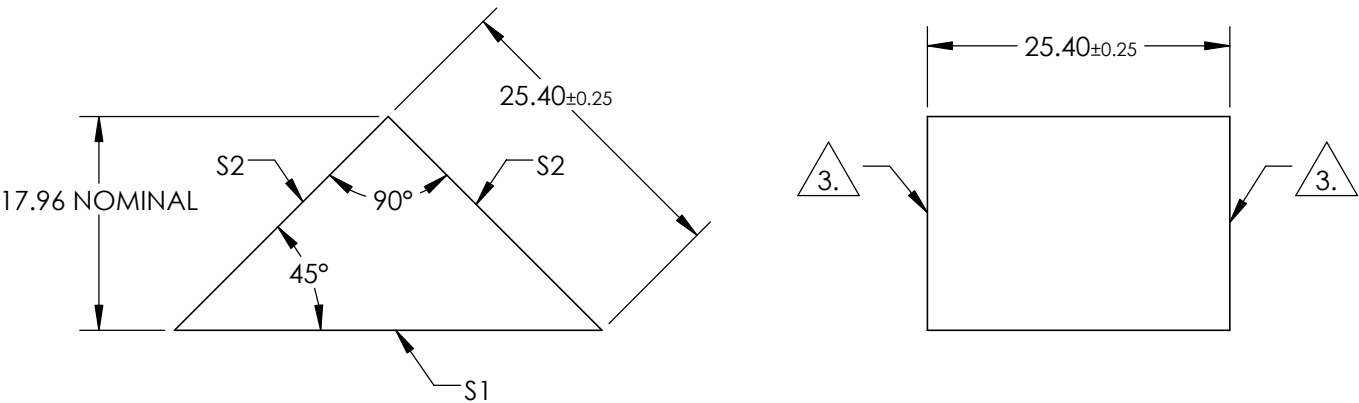

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	<div><div><div>EO[®]</div><div>Edmund Optics[®]</div></div></div>					
CLEAR APERTURE	85%	85%						
ANGLE TOL. (arcmin)	±10	±10						
SURFACE QUALITY	40-20	40-20						
SURFACE FLATNESS	2λ	2λ						
WAVELENGTH RANGE (nm)	200 - 12000	200 - 12000						
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED						
			THIRD ANGLE PROJECTION		TITLE		Barium Fluoride, 25.4mm, Uncoated, ISP Optics IR Right Angle Prism	
			ALL DIMS IN	mm	DWG NO		25038	SHEET 1 OF 1