## NOTES:

SUBSTRATE:

Pyrex or Equivalent

2. PARALLELISM:

SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO <3 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE)


\$1: PROTECTED GOLD R(AVG) ≥95% @ 3000 - 5000nm


S2: NONE



FINE GRIND SURFACE

5. Rohs Compliant

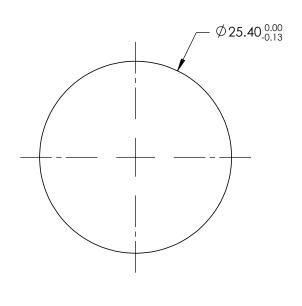

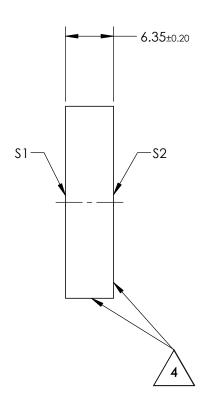

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2			R	<b>Edmund Optics</b>	3
SHAPE	PLANO	PLANO					
SURFACE QUALITY	40-20	FINE GRIND		1		25.4mm Dia., Protected Gold Coated, ISP	,
SURFACE FLATNESS	λ/4	N/A	THIRD ANGLE PROJECTION		TITLE	Optics λ/4 Mirror	
CLEAR APERTURE	22.86	N/A		1		•	
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm	DWG NO		SHEET 1 OF 1