

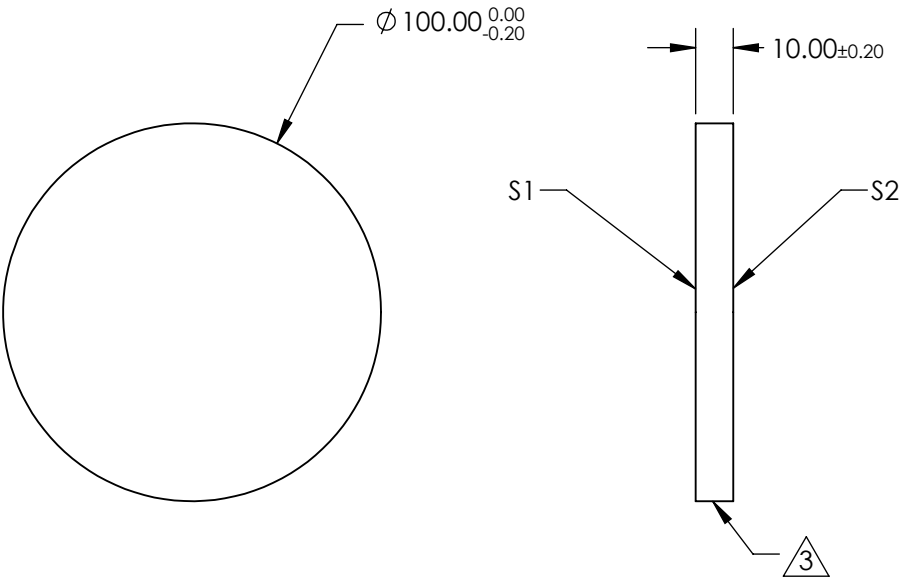

NOTES:

1. SUBSTRATE:
FUSED SILICA

1. COATING (APPLY ACROSS CLEAR APERTURE)
S1: R(AVG) >98% @ 340 - 488nm @ 0° AOI for All Polarizations
R(AVG) >98% @ 320 - 450nm @ 45° AOI for All Polarizations)
R(AVG) >99% @ 320 - 450nm @ 45° AOI for S-Polarization)



S2: NONE

3. FINE GRIND SURFACE



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®				
SHAPE	PLANO	PLANO					
CLEAR APERTURE	Ø 90.00	NA					
SURFACE QUALITY	20 - 10	COMMERCIAL POLISH	TITLE 100mm Dia. 320 - 450nm Broadband λ/10 Mirror				
SURFACE FLATNESS	λ/10 (BEFORE COATING)	NA					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	24046	SHEET 1 OF 3