
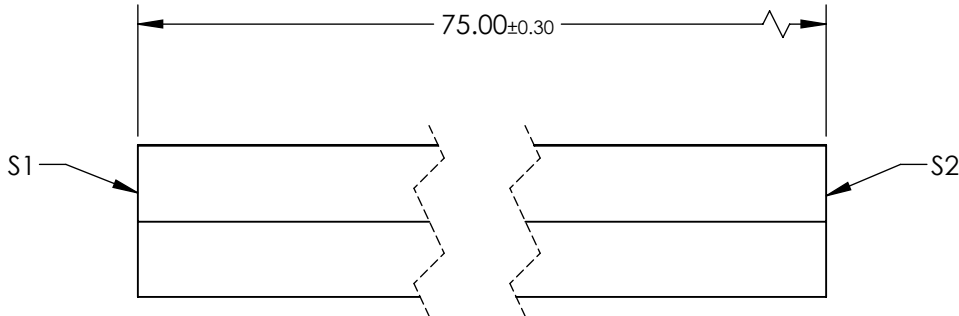
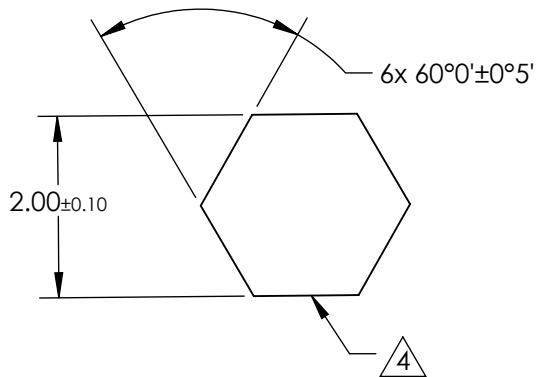


NOTES:


1. SUBSTRATE:  
FUSED SILICA CORNING 7980
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1&S2: VIS-NIR (400-1000nm)  
Rabs ≤0.25% @ 880nm  
Ravg ≤1.25% @ 400 - 870nm  
Ravg ≤1.25% @ 890 - 1000nm
4. SIX SIDEWALLS:  
SURFACE ACCURACY: COMMERCIAL POLISH

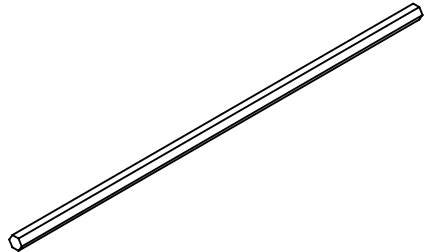

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY



	S1	S2	THIRD ANGLE PROJECTION 		TITLE	3mm Aperture x 25mm L, VIS-NIR Coated, High NA, Fused Silica Light Pipe	
SHAPE	PLANO	PLANO					
SURFACE FLATNESS	1λ	1λ					
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	26545	SHEET 1 OF 24