
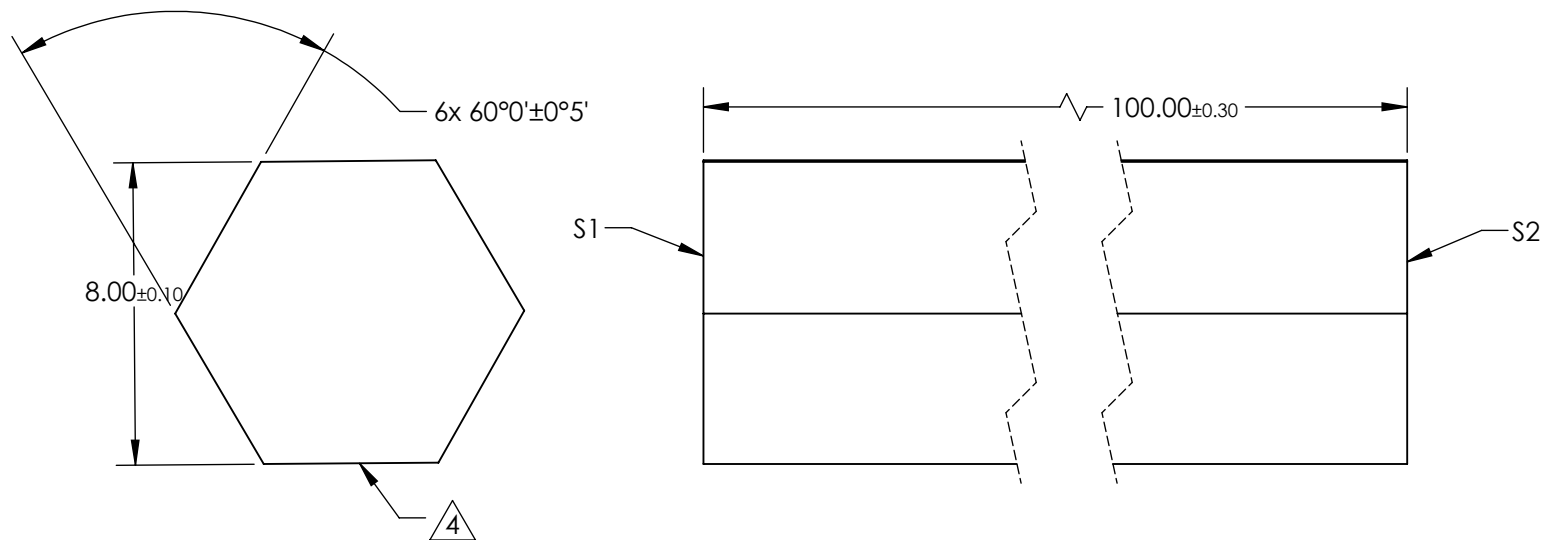


NOTES:
1. SUBSTRATE:
FUSED SILICA CORNING 7980

2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE)
S1&S2: UV-VIS (250-700nm)
Ravg ≤1.5% @ 250 - 700nm
Rabs ≤1.00% @ 350 - 450nm

4. SIX SIDEWALLS:
SURFACE ACCURACY: COMMERCIAL POLISH

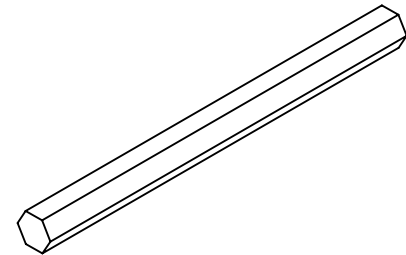

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

EO® Edmund Optics®

| | S1 | S2 | THIRD ANGLE PROJECTION | | TITLE | 8mm Aperture x 100mm L, UV-VIS Coated, Standard NA, Fused Silica Light Pipe | |
|------------------|-------|-------|------------------------|----|--------|--|-------------------|
| SHAPE | PLANO | PLANO | ALL DIMS IN | mm | DWG NO | 26564 | SHEET 20 OF 24 |
| SURFACE FLATNESS | 3λ | 3λ | | | | | |
| SURFACE QUALITY | 60-40 | 60-40 | | | | | |