
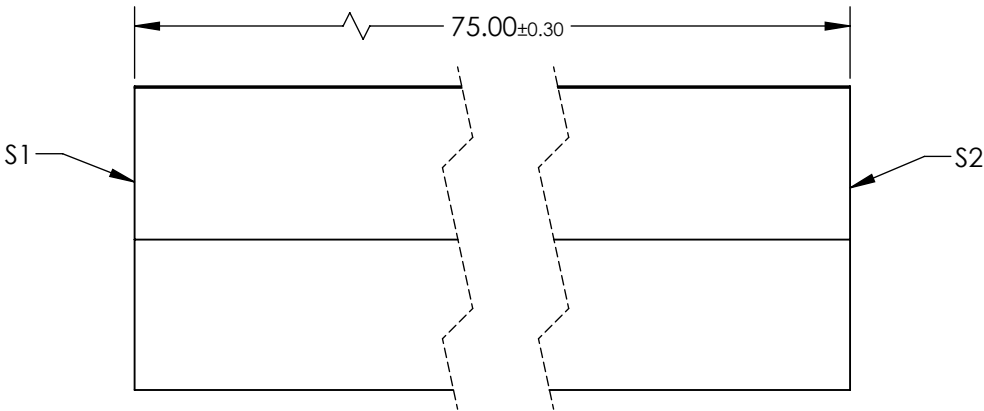
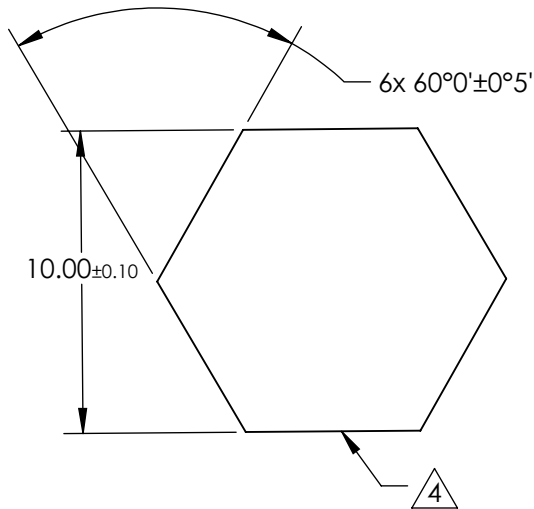


NOTES:  
1. SUBSTRATE:  
FUSED SILICA CORNING 7980

2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1&S2: UV-VIS (250-700nm)  
Ravg ≤1.5% @ 250 - 700nm  
Rabs ≤1.00% @ 350 - 450nm

4. SIX SIDEWALLS:  
SURFACE ACCURACY: COMMERCIAL POLISH

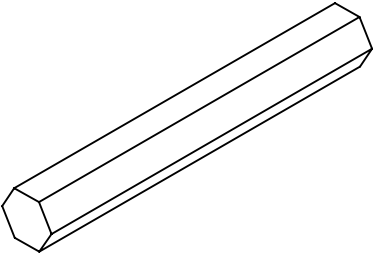

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**Edmund Optics®**

|                  | S1    | S2    | THIRD ANGLE PROJECTION |    | TITLE  | 10mm Aperture x 75mm L, UV-VIS Coated,<br>High NA, Fused Silica Light Pipe |                   |
|------------------|-------|-------|------------------------|----|--------|--|-------------------|
| SHAPE            | PLANO | PLANO | ALL DIMS IN            | mm | DWG NO | 26566  | SHEET<br>22 OF 24 |
| SURFACE FLATNESS | 3λ    | 3λ    |                        |    |        |  |                   |
| SURFACE QUALITY  | 60-40 | 60-40 |                        |    |        |  |                   |