
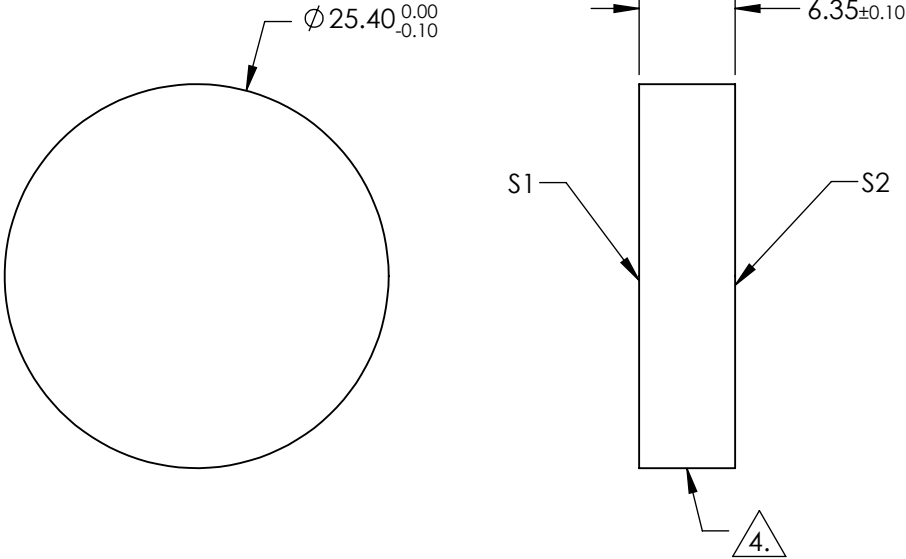



NOTES:

1. SUBSTRATE:
FUSED SILICA
2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN <3 ARCmin
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1: R(abs) > 99.80% @ 2000nm @ 45° AOI
R(avg) > 99.5% @ 1900 - 2200nm @ 45° AOI
- S2: NONE
4. FINE GRIND SURFACE
5. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY
ACROSS CLEAR APERTURE
6. CLEAR APERTURE AND COATING APERTURE ARE CENTERED ON SURFACES



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	<div><div><div><div><div><div></div></div></div><div><div></div></div></div><div><div>Edmund Optics®</div></div></div></div>			
SHAPE	PLANO	PLANO				
SURFACE QUALITY	10 - 5	COMMERCIAL POLISH	<div><div><div>THIRD ANGLE PROJECTION</div><div></div></div><div><div>ALL DIMS IN</div><div>mm</div></div><div><div>DWG NO</div><div>27565</div></div><div><div>SHEET</div><div>40 OF 86</div></div></div>			
SURFACE FLATNESS	λ/10	N/A				
CLEAR APERTURE	Ø 22.86	N/A				
COATING APERTURE	Ø 22.86	N/A				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				