

NOTES:

1. SUBSTRATE:
FUSED SILICA



2. COATING (APPLY ACROSS CLEAR APERTURE)

S1:DIELECTRIC MIRROR (400-750nm)
R(AVG) >98% @ 400 - 750nm @ 0 - 45° AOI
R(AVG) >99% @ 400 - 750nm @ 0° AOI

S2: NONE



3. FINE GRIND SURFACE (ADD INK NOTE AS NEEDED)

4. ROHS COMPLIANT

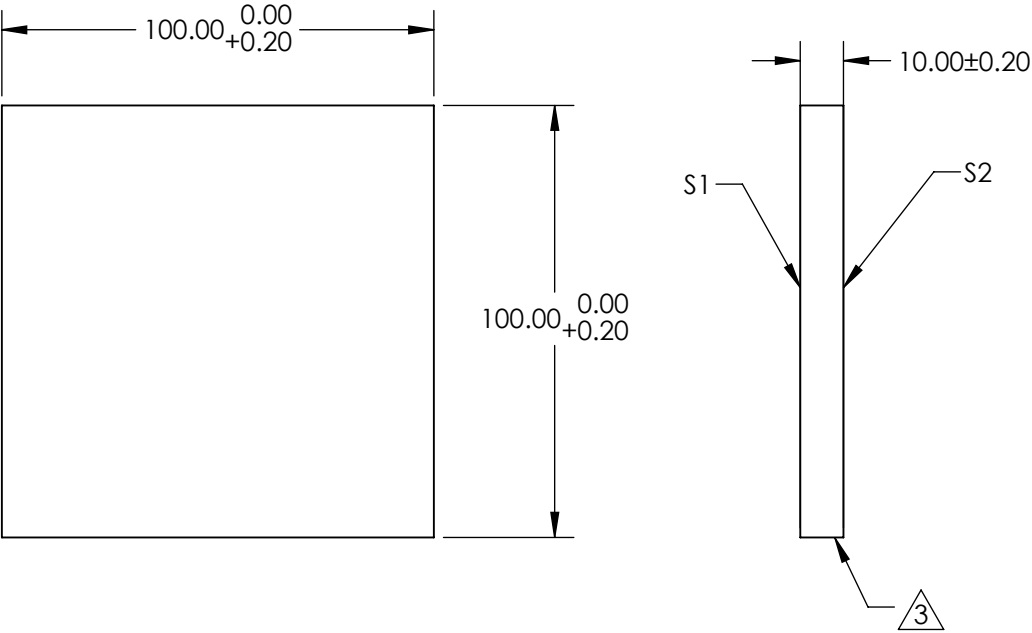

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 Edmund Optics®			
SHAPE	PLANO	PLANO				
CLEAR APERTURE (%)	90	N/A				
SURFACE QUALITY	20 - 10	COMMERCIAL POLISH	ALL DIMS IN	mm	TITLE	100 x 100mm, 400 - 750nm Broadband λ/10 Mirror
SURFACE FLATNESS	λ/10 (BEFORE COATING)	N/A			DWG NO	29923
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED				SHEET 16 OF 24