NOTES:

1. SUBSTRATE:

FUSED SILICA


2. PARALLELISM: 30 ARCSEC

3. COATING (APPLY ACROSS CLEAR APERTURE)

S1: UV Enhanced Aluminum (250-700nm) R(avg) >85% @ 250 - 700nm R(avg) >89% @ 250 - 450nm S2: NONE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. ROHS COMPLIANT

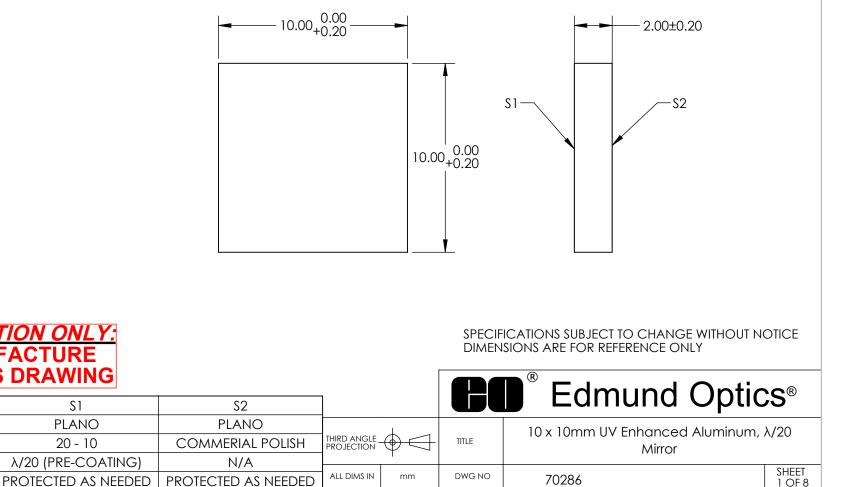

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SHAPE

BEVEL

SURFACE QUALITY

SURFACE FLATNESS