NOTES:

1. SUBSTRATE:


FUSED SILICA

- 2. PARALLELISM: 30 ARCSEC
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1: UV Enhanced Aluminum (250-700nm) R(avg) >85% @ 250 - 700nm R(avg) >89% @ 250 - 450nm

S2: NONE

- 4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 5. ROHS COMPLIANT

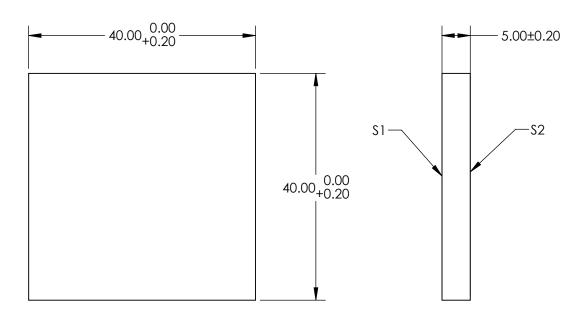

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20 - 10	COMMERIAL POLISH
SURFACE FLATNESS	λ/20 (PRE-COATING)	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

	THIRD ANGLE PROJECTION	•	ī
)	ALL DIMS IN	mm	С

Eamuna Optics®
40 x 40mm UV Enhanced Aluminum, λ/20

6 OF 8

}	TITLE	40 x 40mm UV Enhanced Aluminum, A Mirror	1/20
	DWG NO	70296	SHEE