
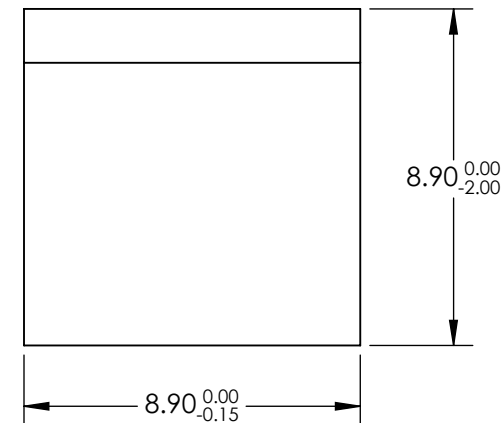
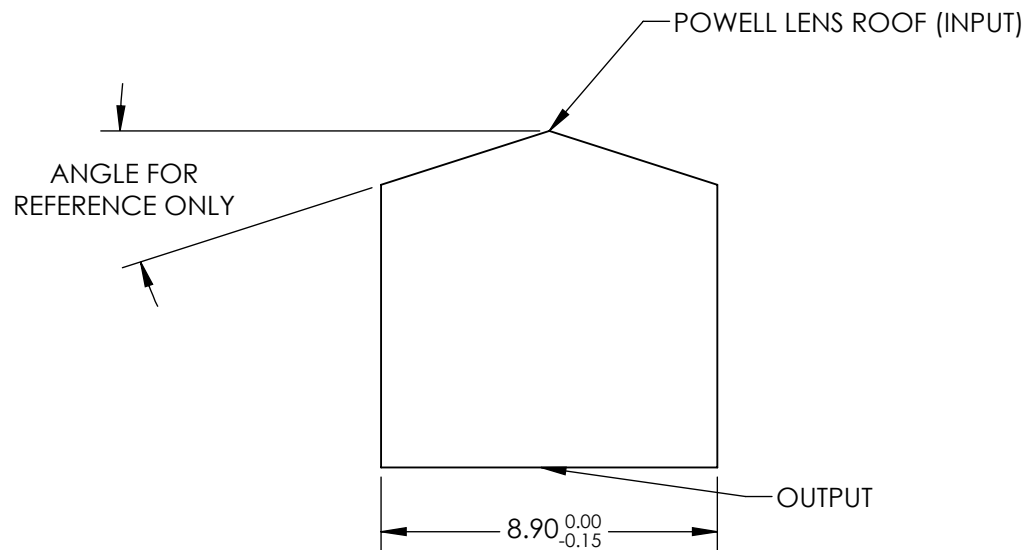


NOTES:


1. SUBSTRATE: N-BK7
2. COATING (APPLY ACROSS INPUT & OUTPUT APERTURES)
S1 & S2: R(ABS) <1.0% @ 500 - 700nm
R(ABS) <1.5% @ 700 - 850nm
3. FAN ANGLE: 10°
4. DESIGNED FOR INPUT BEAM DIAMETER OF 1.3mm (1/e²)
SMALLER BEAMS WILL RESULT IN MORE GAUSSIAN DISTRIBUTION OF GENERATED LINE
LARGE BEAMS WILL RESULT IN HIGHER INTENSITY AT ENDS OF GENERATED LINE



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EO[®] Edmund Optics[®]

THIRD ANGLE PROJECTION				TITLE		10° Fan Angle, 500 - 850nm AR Coated, High Precision Powell Lens			
ALL DIMS IN		mm		DWG NO		70138		SHEET 1 OF 1	