NOTES:

1. SUBSTRATE:


FUSED SILICA CORNING 7980

2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE) \$1&\$2: ∀IS-EXT (350-700nm) Ravg ≤0.5% @ 350 - 700nm @ 0° AOI

4. SIX SIDEWALLS:

5. ROHS COMPLIANT

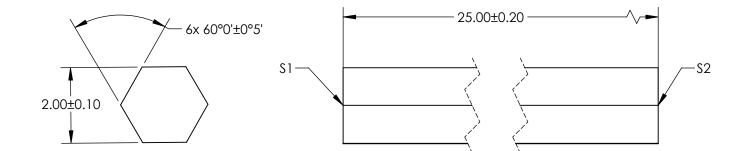

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY



	S1	\$2		TITLE	2mm Aperture x 25mm L, VIS-EXT Coated, High NA, Fused Silica Light Pipe		
SHAPE	PLANO	PLANO					
SURFACE FLATNESS	1λ	1λ					
SURFACE QUALITY	60 - 40	60 - 40	ALL DIMS IN	mm	DWG NO	70714	SHEET 1 OF 21

