## NOTES:


1. SUBSTRATE:


**FUSED SILICA CORNING 7980** 


- 2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
- 3. COATING (APPLY ACROSS CLEAR APERTURE) \$1&\$2: VIS-EXT (350-700nm) Ravg ≤0.5% @ 350 - 700nm @ 0° AOI



5. ROHS COMPLIANT



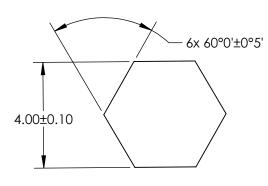

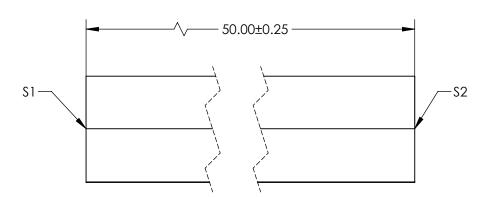

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

DIMENSIONS ARE FOR	REFERENCE ONLY			
	\$1	\$2		I
SHAPE	PLANO	PLANO	THIRD ANGLE PROJECTION	$\odot$
SURFACE FLATNESS	1λ	1λ		1
SURFACE QUALITY	60 - 40	60 - 40	ALL DIMS IN	mm

<b>Edmund Optics</b>	S®
----------------------	----

ANGLE_ ECTION	TITLE		4mm Aperture x 50mm L, VIS-EXT Coated, Standard NA, Fused Silica Light Pipe		
DIMS IN	mm	DWG NO	70721	SHEET 8 OF 21	