NOTES:

1. SUBSTRATE:


FUSED SILICA CORNING 7980


2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE) \$1&\$2: VIS-EXT (350-700nm) Ravg ≤0.5% @ 350 - 700nm @ 0° AOI

4. SIX SIDEWALLS:

5. ROHS COMPLIANT

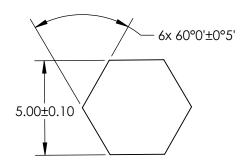

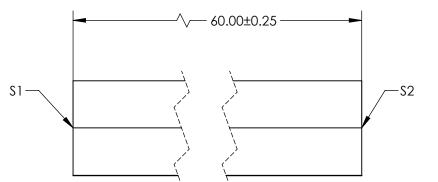

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY



	S1	\$2		TITLE	5mm Aperture x 60mm L, VIS-EXT Coated, Standard NA, Fused Silica Light Pipe		
SHAPE	PLANO	PLANO					
SURFACE FLATNESS	1λ	1λ	I				
SURFACE QUALITY	60 - 40	60 - 40	ALL DIMS IN	mm	DWG NO	70724	SHEET 11 OF 21

