




NOTES:

1. SUBSTRATE:
FUSED SILICA CORNING 7980
2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN
3. COATING (APPLY ACROSS CLEAR APERTURE)
S1&S2: VIS-EXT (350-700nm)
Ravg ≤0.5% @ 350 - 700nm @ 0° AOI



4. SIX SIDEWALLS:


- ## 5. ROHS COMPLIANT

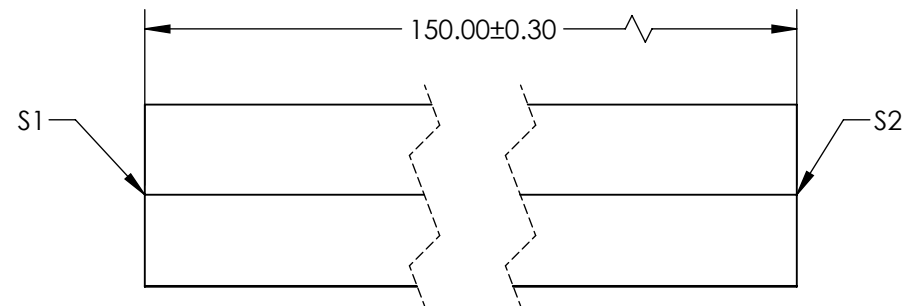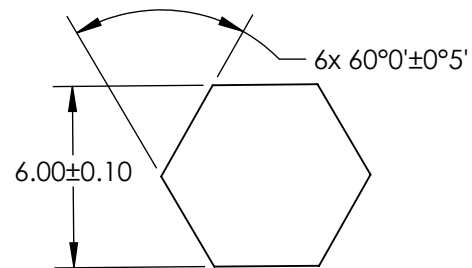

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY



	S1	S2	THIRD ANGLE PROJECTION 		6mm Aperture x 150mm L, VIS-EXT Coated, Low NA, Fused Silica Light Pipe		
SHAPE	PLANO	PLANO			TITLE		
SURFACE FLATNESS	1λ	1λ					
SURFACE QUALITY	60 - 40	60 - 40	ALL DIMS IN	mm	DWG NO	70728	SHEET 15 OF 21