
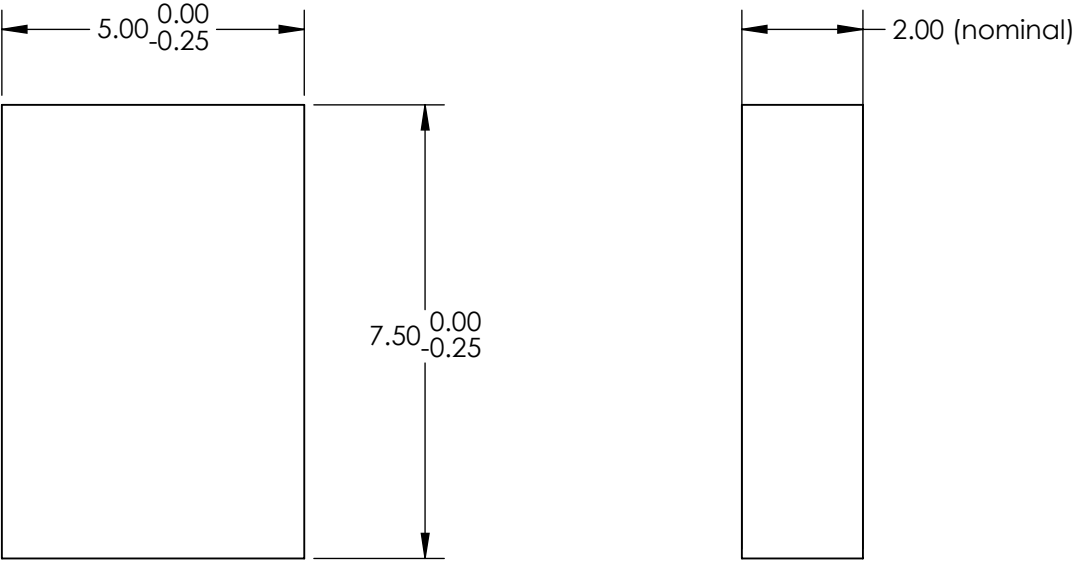


NOTES:

1. SUBSTRATE:  
FLOAT GLASS
2. COATING (APPLY ACROSS CLEAR APERTURE)  
S1: PROTECTED SILVER (450-10,000nm)  
R(AVG) >98% @ 450 - 800nm @ 0° AOI  
R(AVG)>98.5% @ 2000 - 10,000nm @ 0° AOI
- S2: NONE



3. FINE GRIND SURFACE

4. ROHS COMPLIANT



**FOR INFORMATION ONLY:**  
**DO NOT MANUFACTURE**  
**PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	 <b>Edmund Optics®</b>			
SHAPE	PLANO	PLANO				
SURFACE QUALITY	60 - 40	N/A		TITLE		
SURFACE FLATNESS	4 - 6λ	N/A		5 x 7.5mm Silver, 4-6λ Mirror		
CLEAR APERTURE	4.50 x 6.75	N/A				
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	71420
						SHEET 2 OF 9