

NOTES:

1. SUBSTRATE:
FLOAT GLASS

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1: PROTECTED SILVER (450-10,000nm)




R(AVG) >98% @ 450 - 800nm @ 0° AOI

R(AVG) >98.5% @ 2000 - 10,000nm @ 0° AOI

S2: NONE

3.  FINE GRIND SURFACE


4. ROHS COMPLIANT

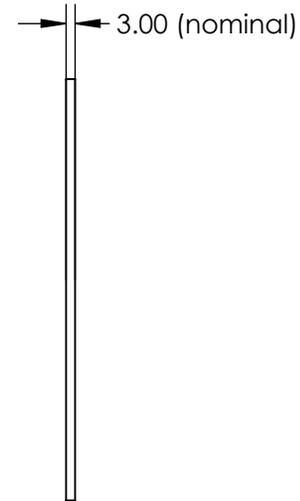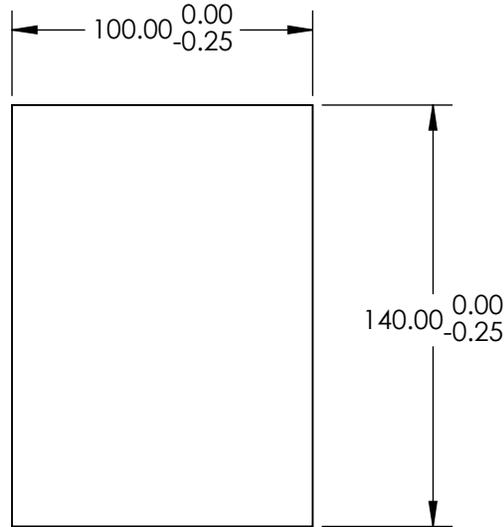

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	60 - 40	N/A
SURFACE FLATNESS	4 - 6λ	N/A
CLEAR APERTURE	90.00 x 126.00	N/A
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



 Edmund Optics®	
TITLE	100 x 140mm Silver, 4-6λ Mirror
DWG NO	71427
SHEET 9 OF 9	