




NOTES:

- 1. SUBSTRATE:
Fused Silica
- 2. COATING (APPLY ACROSS COATING APERTURE):
S1 & S2: VIS 0° (425-675nm)
R(AVG) ≤0.4% @ 425 - 675nm
- 3. EFFECTIVE FOCAL LENGTH: 5.1mm
- 4. DIVERGENCE ANGLE: ±1.6 °
- 5. WAVELENGTH RANGE (nm): 250 - 700
- 6. ROHS: COMPLIANT

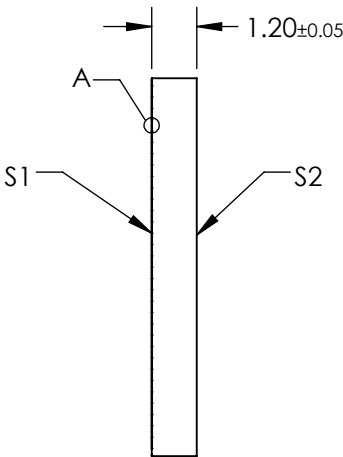

DETAIL A

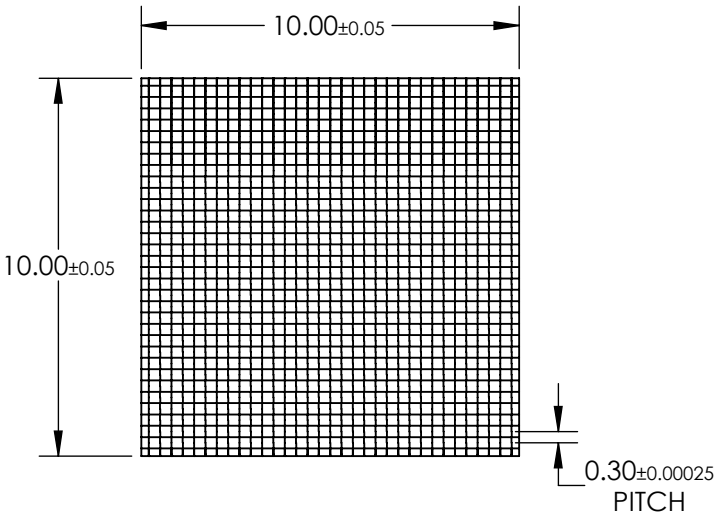

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

Edmund Optics®

THIRD ANGLE PROJECTION		TITLE	Microlens Array 10 x 10mm, 300µm Pitch, 1.6° Divergence, VIS 0° Coated	
ALL DIMS IN	mm	DWG NO	72241	SHEET 1 OF 1