
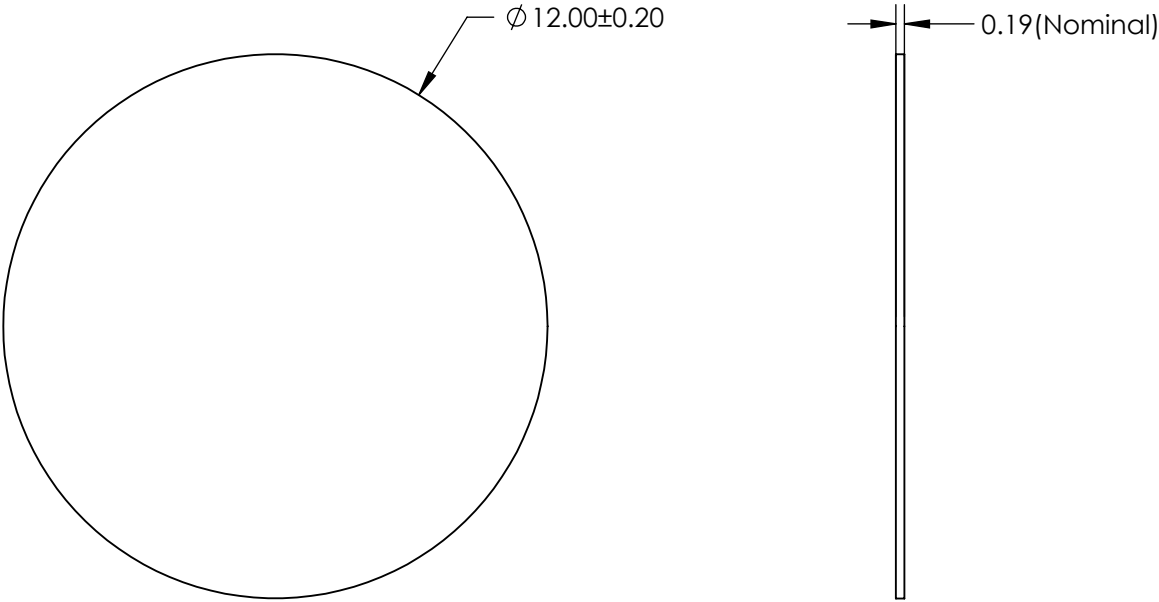


NOTES:


- 1. SUBSTRATE: CTA (Cellulose Triacetate)
- 2. OPERATING TEMPERATURE: -20 TO +70 °C
- 3. WAVELENGTH RANGE (nm): 320 - 750
- 4. COUNTING: UNCOATED
- 5. TRANSMISSION (%)
 - SINGLE: 39 (325 - 400nm)
 - CROSSED: 0.04 (325 - 400nm)
- 6. ROHS COMPLIANT



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EO[®] Edmund Optics[®]

THIRD ANGLE PROJECTION 		TITLE	12.5mm Dia. UV Polarizing Film	
ALL DIMS IN	mm	DWG NO	72679	SHEET 2 OF 5