
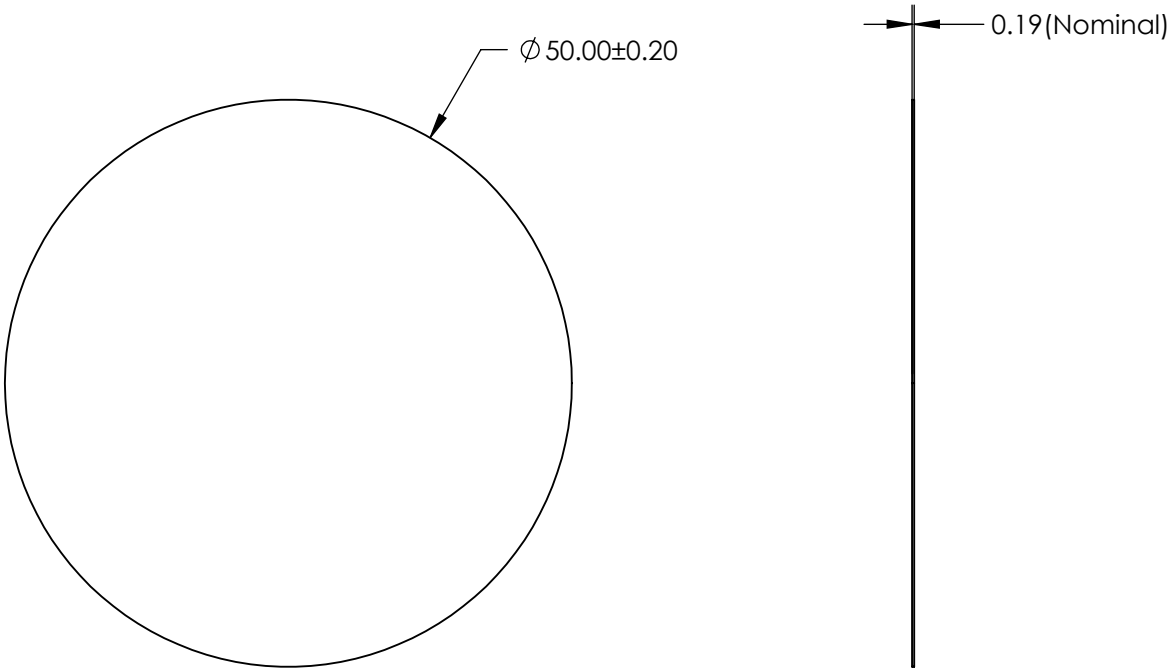


NOTES:

- 1. SUBSTRATE: CTA (Cellulose Triacetate)
- 2. OPERATING TEMPERATURE: -20 TO +70 °C
- 3. WAVELENGTH RANGE (nm): 320 - 750
- 4. COUNTING: UNCOATED
- 5. TRANSMISSION (%)
  - SINGLE: 39 (325 - 400nm)
  - CROSSED: 0.04 (325 - 400nm)
- 6. ROHS COMPLIANT



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

**EO<sup>®</sup> Edmund Optics<sup>®</sup>**

THIRD ANGLE PROJECTION 		TITLE	50mm Dia. UV Polarizing Film	
ALL DIMS IN	mm	DWG NO	72682	SHEET 5 OF 5