
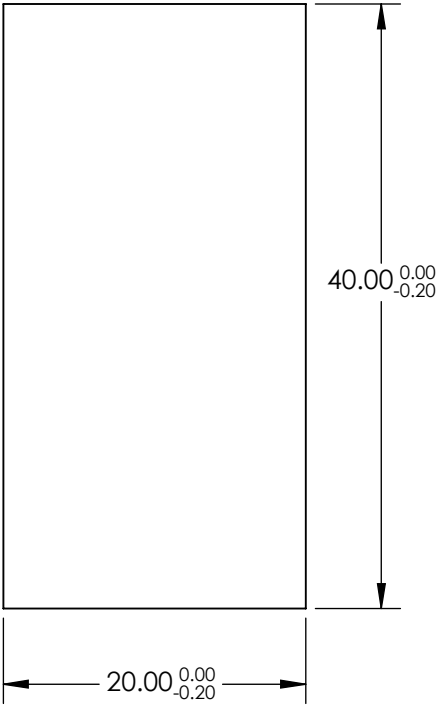
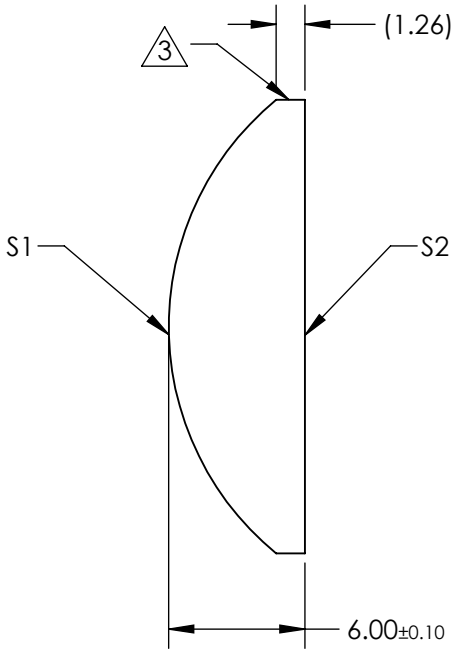


NOTES:

- 1. SUBSTRATE:
N-BK7
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS 0° (425-675nm)
R(avg) ≤0.4% @ 425 - 675nm
- 3. FINE GROUND SURFACE
- 4. POWER, IRREGULARITY, AND SURFACE QUALITY
SPECIFICATIONS APPLY ACROSS CLEAR APERTURE
- 5. ROHS COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL	25.00	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL	23.02			
RADIUS	12.92	∞			TITLE	20mm H x 40mm L x 25mm FL VIS 0° Coated, Illumination Grade PCX Cylinder Lens	
SURFACE QUALITY	60 - 40	60 - 40					
CLEAR APERTURE	19.00 x 39.00	19.00 x 39.00	ALL DIMS IN	mm	DWG NO	25493	SHEET 7 OF 16
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					