
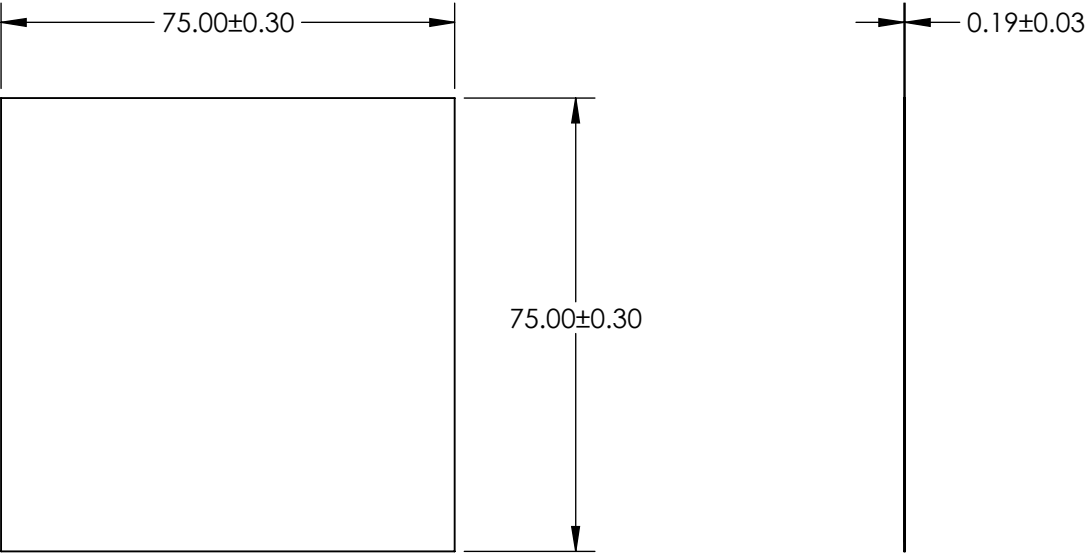


NOTES:


1. SUBSTRATE: Aluminium Wires on COP
2. EXTINCTION RATIO: 2000:1 Avg (Typical, 400-1200nm)
3. TRANSMISSION (%):
Single: 44 Avg (Typical, 400-1200nm);
Parallel: 36 Avg (Typical, 400-1200nm);
Crossed: 0.02 Avg (Typical, 400-1200nm)
4. WAVELENGTH RANGE: 400 - 1200NM
5. ORIENTATION OF AXIS: $0^\circ \pm 2^\circ$
NOTCHES ON POLARIZING FILM DEPICT DIRECTION OF POLARIZATION DIRECTION
6. ROHS COMPLIANT



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EO[®] Edmund Optics[®]

THIRD ANGLE PROJECTION 		TITLE	75 x 75mm Wire Grid Polarizing Film	
ALL DIMS IN	mm	DWG NO	70552	SHEET 6 OF 6