
NOTES:


- 1. SUBSTRATE: FLOAT GLASS
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

\$1 & \$2: BBAR (425-700nm) R(AVG) ≤0.5% @ 425 - 700nm



4. ROHS COMPLIANT

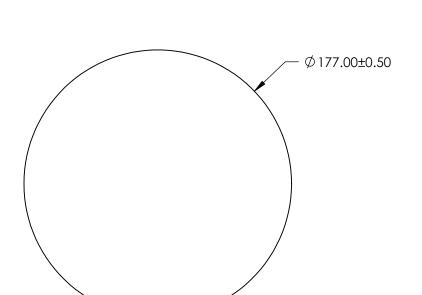

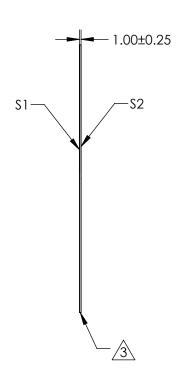

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2			
SHAPE	PLANO	PLANO			
SURFACE QUALITY	80 - 50	80 - 50			
CLEAR APERTURE	Ø160.02	Ø 160.02			
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED			

			Edmund Optics®		
	THIRD ANGLE _ PROJECTION	$\phi \lhd$	TITLE	177.8mm Dia. x 1mm High Efficiency W	indow
D	ALL DIMS IN	mm	DWG NO	71580	SHEET 17 OF 18