

NOTES:



1. SUBSTRATE MATERIAL:  
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR (400-1000nm)  
R(ABS) ≤ 0.25% @ 880nm  
R(AVG) ≤ 1.25% @ 400 - 870nm  
R(AVG) ≤ 1.25% @ 890 - 1000nm


3. FINE GROUND SURFACE

4. RoHS COMPLIANT

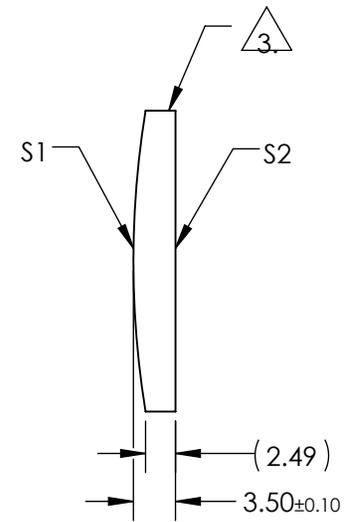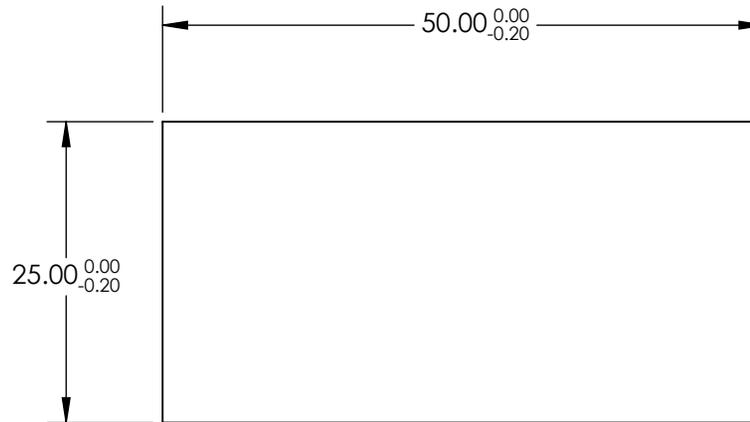

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL	150.00	 <b>Edmund Optics®</b>		
SHAPE	CONVEX	PLANO	BFL	147.7			
RADIUS	77.78	INFINITY	THIRD ANGLE PROJECTION 		TITLE	25mm H X 50mm L X 150mm FL VIS-NIR COATED, CYLINDER LENS	
SURFACE QUALITY	60-40	60-40					
CLEAR APERTURE	24.00 x 49.00	24.00 x 49.00			DWG NO	69787	
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED	ALL DIMS IN	mm			