
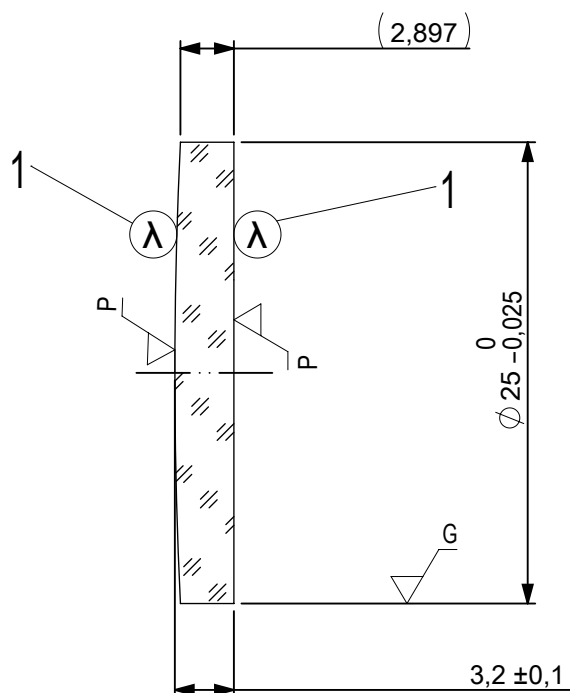




FOCAL LENGTH (EFL): 500 ±5
 BACK FOCAL LENGTH (BFL): 497,89

1 AR COATING: NIR I
 R(AVG) ≤ 0,5% FROM 600-1050nm @ 0° AOI

LEFT SURFACE		MATERIAL	RIGHT SURFACE	
R	258,4±0,258 CX	GLASS N-BK7 517/642	R	∞ PL
Øe	24		Øe	24
3/	3 (0,5) λ=632,8 nm		3/	3 (0,5) λ=632,8 nm
4/	-		4/	1,93'
5/	40 - 20 (MIL-PRF-13830B)		5/	40 - 20 (MIL-PRF-13830B)
6/	-		6/	-

PROTECTIVE CHAMFERS AS NEEDED			FIRST ANGLE PROJECTION		 Edmund Optics®			
ROHS: COMPLIANT	SCALE: NONE	λ = 587,6nm			TITLE 25,0mm Dia, x 500,0mm FL, NIR I Coated, Plano-Convex Lens			
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE. DIMENSIONS ARE FOR REFERENCE ONLY								DWG NO
FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING								
INDICATIONS IN ACCORDANCE WITH ISO 10110			ALL DIMS IN:	mm				